RIDA®
LUBRICANTS










At **Rida** Lubricants
We Bring **Perfection**
With Care



RIDA®
LUBRICANTS



06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com

ABOUT US

Rida Lubricants is a UAE based company that offers full range of lubricants and greases for various industries, including automotive, industrial, marine, and aviation applications. We at Rida prove our selves in offering high-quality lubricants that meet and exceed industry standards, and we have a team of experienced professionals which can provide technical support to customers 24/7.

OUR VISION

Become the leading Manufacturer and Marketer of Lubricants, Greases & Base Oils by striving for excellence. Continue to reach out for greater heights by continuous improvement utilizing technological innovation to improve product quality and serving the clients' needs at all time while
adhering to latest international norms.

OUR VALUE

- Integrity
- Innovation
- Transparency
- Committment
- Team Work
- Customer Satisfication

عن الشركة

ضا للزيوت هي شركة رائدة مقرها دولة الإمارات العربية المتحدة. تقدم مجموعة كاملة من الزيوت و الشحوم لمختلف الصناعات بما في ذلك السيارات و المعدات بمختلف انواعها. نحن في رضا نثبت انفسنا في تقديم مواد تشحيم عالية الجودة تلبي معايير الصناعة و لدينا فريق عمل من المحترفين ذوي الخبرة الذين يمكنهم تقديم الدعم الفني للعملاء على مدار الساعة طوال أيام الأسبوع.

رؤيتنا

تصبح الشركة المصنعة الرائدة و تسويق زيوت التشحيم والشحوم والزيوت الأساسية من خلال السعي لتحقيق التميز. الاستمرار في الوصول إلى مستويات أعلى من خلال التحسين المستمر باستخدام الابتكار التكنولوجي لتحسين جودة المنتج وخدمة احتياجات العملاء في جميع الأوقات الالتزام بأحدث المعايير الدولية.

قيمتنا

- نزاهة
- ابتكار
- الشفافية
- التزام
- العمل بروح الفريق الواحد
- رضا العملاء

06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com

MEET THE TEAM

قابـل الـفـريق



Qaiser Abbas Atif
C.E.O



Harish Angural
Production Manager



Ansar Abbas
Machinery Manager



Ghazanfar Abbas
Quality Controller



Kamil Abbass
Finance Manager



Saba Mughal
General Manager



Jennifer C. Malutao
Marketing Manager



Ahsan Gilani
Trade Specialist



Amnah Adnan
Human Resources



Melissa Kherbouche
Export Manager



Adnan Adeel
Purchasing Manager



Sidra Saleem
Safety Manager



Rizwan Iqbal
Graphic Designer



Wafa Siddiqui
Sales Team Leader



Mishal Usman
Sales & Marketing



Saira Asim
Sales & Marketing



Iqra Khan
Sales & Marketing



Maham Saif
Sales & Marketing



Sayed Waqas
Sales & Marketing

OUR LABORATORIES

Our laboratory is equipped with the most advanced international testing equipments available in the market. We take pride in selecting a team of highly experienced professionals who are passionate about their work.

Our commitment to excellence is reflected in high caliber standards that we maintain. We strive to provide our customers with best possible service and quality standards. We believe in continuous improvement and are constantly updating our processes to ensure that we stay ahead of the curve in the industry.

مختبراتنا


تم تجهيز مختبرنا بأحدث معدات الاختبار الدولية المتوفرة في السوق. نحن نفخر باختيار فريق من المهنيين ذوي الخبرة العالية والمتحمسين لعملهم.

وينعكس التزامنا بالتميز في المعايير العالية الجودة التي نحافظ عليها. نسعى جاهدين لتزويد عملائنا بأفضل معايير الخدمة والجودة الممكنة. و نؤمن بالتحسين المستمر ونقوم بتحديث عملياتنا باستمرار لضمان بقائنا في صدارة الصناعة.



OUR CERTIFICATES

شـــهـــاداتـنا

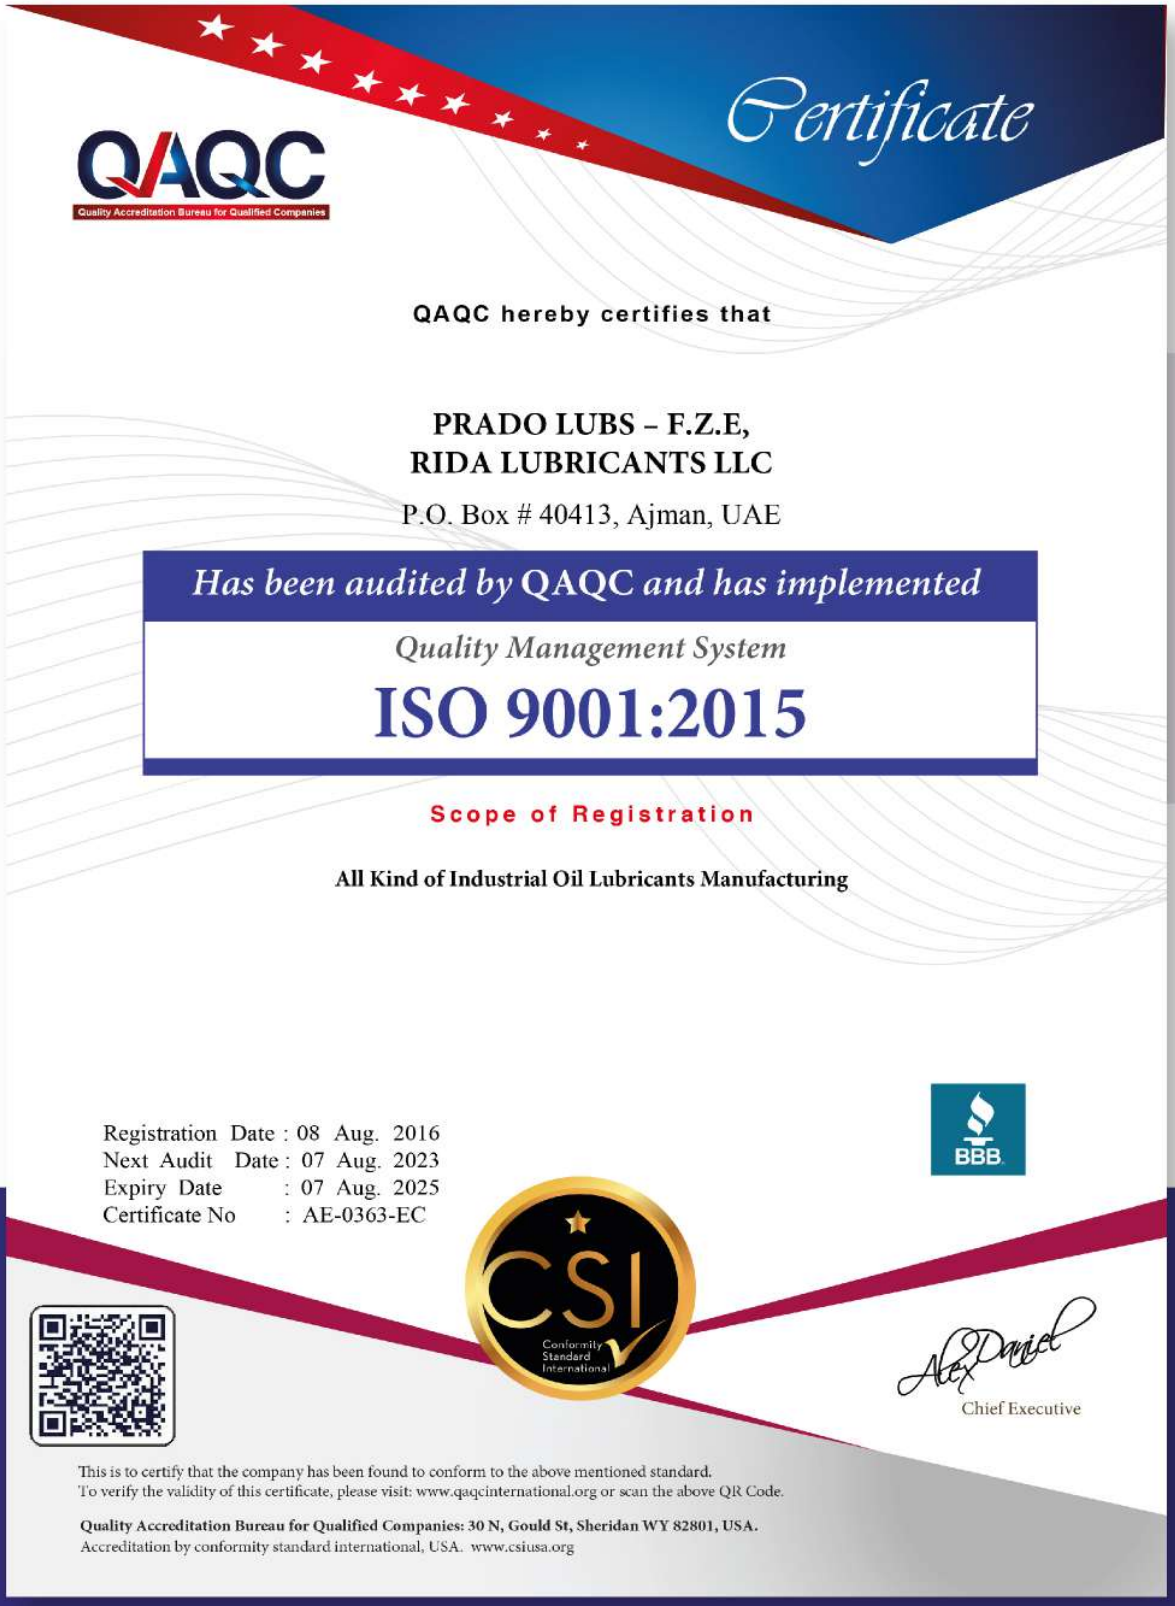

QAQC
Quality Accreditation Bureau for Qualified Companies

Certificate

QAQC hereby certifies that

PRADO LUBS – F.Z.E,
RIDA LUBRICANTS LLC

P.O. Box # 40413, Ajman, UAE

Has been audited by QAQC and has implemented

Quality Management System

ISO 9001:2015

Scope of Registration

All Kind of Industrial Oil Lubricants Manufacturing

Registration Date : 08 Aug. 2016
Next Audit Date : 07 Aug. 2023
Expiry Date : 07 Aug. 2025
Certificate No : AE-0363-EC

BBB

CSI Conformity Standard International

Chief Executive

This is to certify that the company has been found to conform to the above mentioned standard.
To verify the validity of this certificate, please visit: www.qaqcinternational.org or scan the above QR Code.

Quality Accreditation Bureau for Qualified Companies: 30 N, Gould St, Sheridan WY 82801, USA.
Accreditation by conformity standard international, USA. www.csiusa.org

OUR CERTIFICATES

شـــهـــاداتـنا

License No: 3827

SCHEDULE A - LICENSE AGREEMENT

The marks referred to and licensed under the Agreement between API and

RIDA LUBRICANTS LLC

may be used through 31-Mar-2024 are as follows:

API SERVICE SYMBOL

Licensee is authorized to display the API Certification Mark on the following products:

BRAND NAME	SAE VISCOSITY GRADE	API SERVICE CATEGORY	CLASSIFICATION
RIDA LUBRICANTS DIESEL	**15W-40**	**CJ-4**	**CI-4 PLUS**

Manager - EOLCS/DEF/MOM

Date: 09-Aug-2023

Engine Oil Licensing and Certification System

Copyright 2020 – American Petroleum Institute, all rights reserved. API, the API logo, the API Certification Mark ("Starburst"), the API Service Symbol ("Donut"), and the API Certification Mark ("Shield") are either trademarks or registered trademarks of API. 2020-342 | 02.20

To verify the authenticity of this document, go to: engineoil.api.org/Directory/EolcsSearch

RIDA®
LUBRICANTS

Table of Contents

- GASOLINE / DIESEL ENGINE OILS
- GEAR & ATF LUBRICANTS
- MOTORCYCLES LUBRICANTS
- HYDRAULIC OILS / MACHINE OILS
- INDUSTRIALS LUBRICANTS
- MARINE LUBRICANTS
- MULTI-PURPOSE GREASES
- SPECIALITY LUBRICANTS

جدول المحتويات

- زيوت محركات البنزين والديزل
- زيوت التروس والسائل ناقل حركة أوتوماتيكي
- زيوت تشحيم الدراجات النارية
- الزيوت الهيدروليكية / زيوت الآلات
- زيوت التشحيم الصناعية
- زيوت التشحيم البحرية
- شحم متعدد الأغراض
- الشحوم الخاصة



06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com

RIDA®
LUBRICANTS



100%
Customer Satisfaction Promised



06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com

GASOLINE / DIESEL ENGINE OILS

RIDA® LUBRICANTS



AVAILABLE PACKING

1L, 4L, 5L, 20L, 208L

GASOLINE ENGINE OILS

زيــوت محركات البنزين

SAE Viscosity	K.Viscosity (cSt) 40°C	K.Viscosity (cSt) 100°C	VI	Flash Point °C	Pour Point °C	Application
0W20	46	8.25	155	232	-39	* API SL, SM, SN
5W30	57.8	10.2	166	240	-39	* API SL, SM, SN
5W40	85.3	14.3	174	242	-39	
10W40	105	14.9	148	228	-36	* API SL, SM, SN
20W50	160	19.1	136	242	-29	

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.



AVAILABLE PACKING

1L, 4L, 5L, 20L, 208L

DIESEL ENGINE OILS

زيوت محركات الديزل

SAE Viscosity	K.Viscosity (cSt) 40°C	K.Viscosity (cSt) 100°C	VI	Flash Point °C	Pour Point °C	Application
5W30	64	10.5	153	224	-39	* API CH, CI, CJ, CK *ACEA A3/B4
5W40	103	14.9	151	238	-39	
10W40	92.5	14.3	160	242	-39	* API CH, CI, CJ, CK *ACEA A3/B4
15W40	103	14.5	145	234	-32	* API CH, CI, CJ, CK *ACEA A3/B4
20W50	155	19.1	140	248	-30	* API CH, CI, CJ, CK *ACEA A3/B4

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com

GEAR OILS / TRACTOR FLUID / ATF

RIDA LUBRICANTS

GEAR OILS

زيوت التروس

SAE Viscosity	K.Viscosity (cSt) 40 °C	K.Viscosity (cSt) 100 °C	VI	Flash Point °C	Pour Point °C	Application
SAE 90	161	15.5	95	230	-33	GL-4, GL-5
SAE 140	204	18.0	95	310	-12	
80W90	136	14.5	105	202	-30	
80W140	188.9	25	165	225	-38	
85W140	410	28.9	96	210	-15	

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.



AVAILABLE PACKING

1L, 4L, 5L, 20L, 208L

TRACTOR FLUID

سائل الجرار

SAE Viscosity	K.Viscosity (cSt) 40 °C	K.Viscosity (cSt) 100 °C	VI	Flash Point °C	Pour Point °C	Application
GL-5	69.3	10.4	136	230	-36	GL-4, GL-5

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

ATF (Automatic Transmission Fluid)

السائل ناقل حركة أوتوماتيكي

DEX Viscosity	K.Viscosity (cSt) 40 °C	K.Viscosity (cSt) 100 °C	VI	Flash Point °C	Pour Point °C	Application
ATF II	28.0	5.8	160	222	-51	Dexron - 2
ATF III	38.0	7.6	175	226	-45	Dexron - 3
CVT Fluid	34.2	7.1	179	214	-51	Suitable for use where Dexron VI is required

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.



AVAILABLE PACKING

1L, 4L, 5L, 20L, 208L

06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com

MOTORCYCLE OIL / COMPRESSOR OIL / COOLANT

RIDA LUBRICANTS



AVAILABLE PACKING

1L, 4L, 5L, 20L, 208L

MOTORCYCLE OILS

زيـــوت الدراجات النارية

SAE Viscosity	K.Viscosity (cSt) 40 °C	K.Viscosity (cSt) 100 °C	VI	Flash Point °C	Pour Point °C	Application
4T	98.5	14.5	152	226	-40	For 4-strokes engine motorcycles. JASO MA MA2 API SN
10W40	108.1	14.6	139	236	-36	
20W50	160.5	18.8	132	248	-33	

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

COMPRESSOR OILS

زيـــت الـــضاغـــط

API Viscosity	Specific gravity (15/4 °C)	K.Viscosity(cSt) 40 °C	K.Viscosity(cSt) 100 °C	VI	Flash Point °C	Pour Point °C	copper-corrosion (100°C, 3hrs)	Application
ISO VG 32	0.860	32.0	5.5	108	230	-30	1a	*Reciprocating type compressors
ISO VG 46	0.867	46.0	7.0	109	234	-30	1a	
ISO VG 68	0.872	68.0	9.0	107	236	-27	1a	
ISO VG 32	0.860	32.0	5.5	108	230	-30	1a	*Rotary type compressors
ISO VG 46	0.867	46.0	7.0	109	234	-30	1a	
ISO VG 68	0.872	68.0	9.0	107	236	-27	1a	

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.



AVAILABLE PACKING

1L, 4L, 5L, 20L, 208L

ANTIFREEZ COOLANT

سائل تبريد المحرك

Concentration (%)		Freezing Point (°C)
Water (%)	A/F (%)	
0(%)	100(%)	-20°C
70(%)	30(%)	-17°C
50(%)	50(%)	-36°C
40(%)	60(%)	-52°C
30(%)	70(%)	-18°C

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com

HYDRAULIC OILS / MACHINE OILS

RIDA LUBRICANTS

HYDRAULIC OILS

زيـــــوت هـيـدروليـك

API Viscosity	Specific gravity (15/4 °C)	K.Viscosity(cSt) 40 °C	K.Viscosity(cSt) 100 °C	VI	Flash Point °C	Pour Point °C	copper-corrosion (100°C, 3hrs)	Application
ISO VG32	0.858	32.0	5.5	108	228	-33	1a	*Anti-wear type (AW Type) *General purpose *General hydraulic system oil circulation system. compressor & bearing oils
ISO VG 46	0.862	46.0	7.1	113	234	-30	1a	
ISO VG 68	0.871	68.0	9.1	109	238	-30	1a	
ISO VG 100	0.878	96.0	11.3	104	240	-27	1a	
ISO VG 150	0.880	150.0	15.3	103	246	-24	1a	

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.



AVAILABLE PACKING

1L, 4L, 5L, 20L, 208L

BRAKE FLUID

زيـت الـفـرامـل

Type	K.Viscosity(cSt) 40 °C	K.Viscosity(cSt) 100 °C	Corrosion test 120 Hrs.	ERPB	pH	Wet ERBP	Application
DOT 3	1300	2.4	Pass	238	9	148	* For use in automotive disc, drum and anti-skid brake systems and clutch systems.
DOT 4	1250	2.1	Pass	270	8	170	* For hydraulic disc brakes and drum brakes on motorcycles, cars, commercial vehicles and machines.

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.



AVAILABLE PACKING

20L, 208L

MACHINE OILS

زيـــوت الآلات

API Viscosity	Specific gravity (15/4 °C)	K.Viscosity(cSt) 40 °C	K.Viscosity(cSt) 100 °C	VI	Flash Point °C	Pour Point °C	copper-corrosion (100°C, 3hrs)	Application
ISO VG 10	0.830	10.0	2.7	108	179	-45	1a	*High speed spindle bearing
ISO VG 15	0.830	15.0	3.5	112	208	-39	1a	
ISO VG 22	0.842	22.0	4.37	107	224	-27	1a	
ISO VG 68	0.870	68.0	8.92	105	240	-24	1a	*Multi-purpose industrial oil
ISO VG 100	0.878	100.0	11.7	105	248	-21	1a	
ISO VG 150	0.880	150.0	15.2	102	252	-12	1a	
ISO VG 220	0.885	220.0	19.5	101	256	-12	1a	
ISO VG 320	0.890	320.0	25	100	260	-9	1a	
ISO VG 460	0.890	460.0	30.9	97	266	-9	1a	

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com

INDUSTRIAL GEAR OILS / HEAT TRANSFER OIL

RIDA® LUBRICANTS

INDUSTRIAL GEAR OILS

زيـوت الـتـروس الصـناعية



AVAILABLE PACKING

1L, 4L, 5L, 20L, 208L

ISO Viscosity	Specific gravity (15/4 °C)	K.Viscosity(cSt) 40 °C	K.Viscosity(cSt) 100 °C	VI	Flash Point °C	Pour Point °C	copper-corrosion (100°C, 3hrs)	Application
ISO VG 68	0.870	68.0	8.8	102.0	242	-27	1b	*Multi-purpose EP industrial oil
ISO VG 100	0.880	100.0	11.5	102.0	248	-27	1b	
ISO VG 150	0.880	150.0	15.1	101.0	252	-27	1b	
ISO VG 220	0.890	220.0	19.5	101.0	256	-24	1b	
ISO VG 320	0.895	320.0	24.9	100.0	270	-24	1b	
ISO VG 460	0.901	460.0	31.7	100.0	276	-21	1b	
ISO VG 680	0.901	680.0	43.0	106.0	282	-21	1b	

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

HEAT TRANSFER OIL

زيـــت نـقل الحـرارة



AVAILABLE PACKING

20L, 208L

API Viscosity	Specific gravity (15/4 °C)	K.Viscosity(cSt) 40 °C	K.Viscosity(cSt) 100 °C	VI	Flash Point °C	Pour Point °C	copper-corrosion (100°C, 3hrs)	Application
ISO VG 32	0.850	32.0	5.5	108	230	-15	1a	*Various kinds of oil application for heat transfer
ISO VG 46	0.860	46.0	7.0	109	250	-15	1a	

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

TRANSFORMER OIL

زيت الـمـحـولات

API Viscosity	K.Viscosity (cSt) 40 °C	Viscosity Index	Flash Point (PMCC)	Pour Point	Before Treatment	After Treatment	Application
Inhibited	8.9	≥110	≥150	-30	>30	>70	*Transformer oil is used to insulate high-voltage electrical infrastructure such as transformers, capacitors, switches and circuit breakers.
Unhibited I	15.0	≥110	≥150	-36	>30	>70	
Unhibited II	10.0	≥110	≥150	-48	>30	>70	

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com

MARINE ENGINE OIL / SLIDEWAY OILS

RIDA® LUBRICANTS

MARINE ENGINE OIL

زيت المحرك البحري

API Viscosity	K.Viscosity(cSt) 100 °C	VI	TBN	Flash Point °C	Pour Point °C	Application
SAE 30	9.3	≥95	40	≥230	-12	* All types of marine engines
SAE 40	12.5	≥95	40	≥230	-9	
SAE 50	16.3	≥95	40	≥230	-6	

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.



AVAILABLE PACKING

1L, 4L, 5L, 20L, 208L

SOLUBLE CUTTING OIL

زيوت القطع القابلة للذوبان

Cutting Oil	Specific gravity (15/4 °C)	K.Viscosity(cSt) 40 °C	K.Viscosity(cSt) 100 °C	Emulsion Type	Corrosion Test	pH at 3% Emulsion	Refracto-meter correction Factor	Application
Soluble Cutting Oil	0.95	>40.0	>6.0	Milky	3	9.1	1	*fabricating, forming, stamping, turning, milling sawing, bending, broaching and tapping.

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

THREAD CUTTING OIL

زيـت قـطع الخـيـط

Cutting Oil	K.Viscosity(cSt) 40 °C	Copper Strip Corrosion for 3 Hrs.	Flash Point	Active Sulphur	Application
Thread Cutting Oil	32	1a	>215	Nil	*lubricate, dissipate heat, from the tool and workpiece, and remove chips during the cutting process.

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

NEAT CUTTING OIL

زيـت قـطع المنظم

Cutting Oil	K.Viscosity(cSt) 40 °C	Copper Strip Corrosion for 3 Hrs.	Flash Point	Active Sulphur	Application
Neat Cutting Oil	36	1a	>215	Nil	* light machining to heavy-duty operat-ions, eg., gear hobbing, broaching, turning, honing and drilling.

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

SLIDEWAY OILS

زيوت الممرات المنزلقة

API Viscosity	Specific gravity (15/4 °C)	K.Viscosity(cSt) 40 °C	K.Viscosity(cSt) 100 °C	VI	Flash Point °C	Pour Point °C	copper-corrosion (100°C, 3hrs)	Application
ISO VG 32	0.860	32.0	5.9	130	230	-36	1a	*Slideway and hydraulic oil for lightly loaded machining equipments
ISO VG 68	0.874	68.0	9.7	124	248	-27	1a	*Slideway for medium and heavy loaded equipments
ISO VG 100	0.885	220.0	20.5	248	252	-24	1a	*Vertical or heavily loaded slideway oil

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.



AVAILABLE PACKING

1L, 4L, 5L, 20L, 208L

06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com

RIDA® LUBRICANTS

MULTI-PURPOSE GREASE

شحم متعدد الأغراض









Color	Soap	Penet-ration (NLGL)	Melting Poin (°C)	Oil Sep-aration	Oxidation Stability	Copper Corrosion	Service Temp	Properties	Application
Dark Brown	Lithium	00 (415)	190	8.5	0.25	PASS	-30.0°C ~120°C	*High EP *Good Antiwear *Oxidation stability *Corrosion control *Rust preventative *Good water-washout characteristic	*Central grease feeding system *EP point *Concrete pump-car *Wheel bearing grease *Ball joint,universal joint and etc... *Construction equipment *Heavy-duty equipment *Autonotive CVJ
		0 (370)	195	7.5	0.25	PASS	-30.0°C ~120°C		
		1 (320)	202	5.0	0.25	PASS	-30.0°C ~130°C		
		2 (270)	208	2.5	0.25	PASS	-30.0°C ~130°C		
		3 (235)	208	1.5	0.25	PASS	-30.0°C ~130°C		
Red	Lithium	2 (270)	210		0.25	PASS	-30.0°C ~140°C	*Excellent coherence *Good	*Where noise - reducing water resisting lubrica-ting area *Rolling bearing or sliding area requiring sealing
Blue		2 (270)	210		0.25	PASS	-30.0°C ~140°C		
Black	Lithium	2 (270)	220		0.25	PASS	-30.0°C ~150°C	*Very high EP *Anti-wear *Usable under severely high load	*Automotive CVJ *Anti-wear for various bearings *Joint and spline shaft *EP and antiwear required

AVAILABLE PACKING

0.5Kg, 1Kg, 15Kg, 180Kg

06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com

RIDA® LUBRICANTS

SPECIAL GREASES

شـــحـوم خـاصـة



High-speed, Hi-temp & Heavy Load Grease

Color	Soap	Penet-ration (NLGL)	Melting Poin (°C)	Copper Corrosion	Service Temp	Properties	Application
Gray black	Inorganic	2	NONE	PASS	-40.0°C ~280°C	*Not carbonized at high temp *Tenacious lubricationg	*Fan, coating roll, furnace, heat blower, tender, klin, painting line trolley, C&L calendar machine & etc...
Black	Inorganic	2	NONE	PASS	-45.0°C ~290°C	*Long life under hi-temp *Keep lubricating under hot steam	



Synthetic Grease Lithium-Complex Base

Color	Texture	Dropping Point	Water Washout Resistence	Copper Corrosion	Worked Penetration	NLGI Classification	Application
Red	Smooth	265	6	PASS	265-295	1-2	*Operating under high loads and temperatures, heavy machinery, couplings and transmission shafts.

Lithium - Complex Grease

Color	Texture	Dropping Point	Water Washout Resistence	Copper Corrosion	Worked Penetration	NLGI Classification	Application
Red	Smooth	265	6	PASS	265-295	1-2	Automotive, agricultural, construction, industry, mining, paper and steel mills.



Calcium Sulfonate Grease

Color	Texture	Dropping Point	Water Washout Resistence	Copper Corrosion	Worked Penetration	NLGI Classification	Application
Pale Yellow	Smooth	90 -110	<5	PASS	265-295	1-2	Automotive, agricultural, construction, industry, mining, paper and steel mills.

High Speed Synthetic Grease

Color	Soap	Penet-ration (NLGL)	Melting Poin (°C)	Copper Corrosion	Service Temp	Properties	Application
White	Lithium	2	200	PASS	-40.0°C ~130°C	*No splash at high speed *Low temp characteristics *Compatible with plastics	*Textile machine, machine tool spindle, optical machine, precision machine & etc...
White	Lithium	2	200	PASS	-50.0°C ~140°C		



AVAILABLE PACKING

0.5Kg, 1Kg, 15Kg, 180Kg

06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com

THE HOUSE OF WORLD CLASS & EXCELLENT LUBRICANTS



MAKING THE RIGHT CHOICE

'GOOD' engine oils are conventional mineral based engine oils suitable for the everyday driver. Standard service conditions specified in the owner's manual can be met with this range of products.

'BETTER' engine oils are synthetic blends. They provide more protection than conventional or 'good' grades. These oils are suitable for severe service conditions where a vehicle may endure stop-start driving or short trips, long idling periods, towing of heavy loads (such as boats, trailers or driving a utility) or may require long drain capabilities.

'BEST' engine oils are full synthetic grades that offer superior protection. Severe and high performance applications can be met with this range. If you want the ultimate protection for your engine, Rida recommends the use of fully synthetic lubricants.

06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com































06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com



HEAD OFFICE

+971 6 749 2994, +971 56 103 1399, P.O.Box : 40413, Industrial Area 2, Ajman, U.A.E

BRANCHES

+84 93 5761 879
11-3A Nguyen Lau
Ward 9, Tuy Hoa
Phu Yen, Vietnam

+1 631 993 7434
15 W 38 Street,
Suit 835, New York
NY 10018

+20 122 5187 194
Plot No. 94,
Karnak, Amreya
Alexandria, Egypt

+265 982 12 70 46
P.O. Box : 1198
Mchinji Rd, Njewa
Lilongwe, Malawi

+880 2 2266 22681
241/1-C, Hasan Tower
Amtola Bazar, Mirpur
Dhaka, Bangladesh

+92 332 61 01 040
+92 52 427 2166
14-Nishat Park Paris Rd.
Sialkot, Pakistan

06 749 2994 | 056 103 1399 oil.lubricants@hotmail.com info@ridalubs.com www.ridalubs.com